

Verint® V4420 Modular Camera System

Verint's 4420 is a high-performance Full-HD split-type camera system. Its discreet design, rich functionality and ability to be flexibly integrated into even the tightest spaces, make this camera ideal for indoor or covert surveillance of ATMs, banks, stores and offices.


The 4420 features a separate camera unit and video core design, enabling the tiny camera unit (with 5-meter long cable) to be easily and flexibly installed into any decoration or interior design, thus preserving stylish appearances while dramatically saving on installation time and cost.

The 4420 offers two camera choices, A 2MP pinhole and a 2MP Wide format lens that can be used for 180 degree view. Both camera units incorporate a number of advanced features found in Verint cameras, including True WDR, AdaptiveStream technology, 3DNR, 802.3af compliant PoE, and on-board storage. All of these features and the 4420's unique design allow the camera units to capture clear images in high-contrast scenes, and to make this camera system the best possible solution for indoor surveillance when discretion is important.



Key Features:

- Discreet, Recessed-Mount Camera Units
- 2 Camera Options: 2MP WDR Pinhole or 2MP WDR Fisheye Camera
- Two-Way Audio on Video Core
- Real-time H.264 and MJPEG Compression
- AdaptiveStream to Optimize Bandwidth Efficiency
- True WDR for Unparalleled Visibility in High Contrast Environments
- 3D Noise Reduction
- Video Rotation for Corridor View
- Built-in IEEE 802.3af Compliant PoE

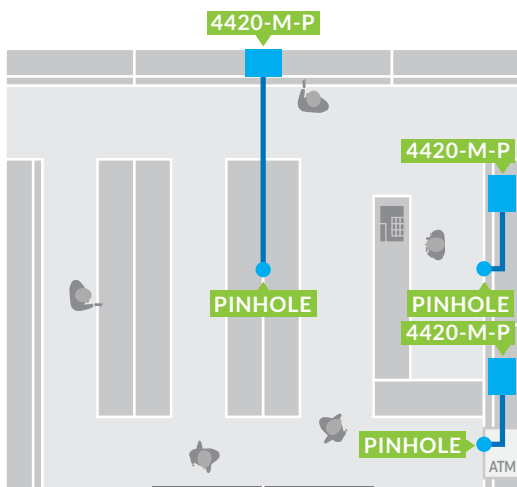

Modular Camera System



ATM



Retail



Bank



Office

VERINT.

Verint V4420 Modular Camera System

TECHNICAL SPECIFICATIONS: CAMERA UNITS

MODEL	4420-M-P: PINHOLE	4420-M-W: 180 DEGREE WIDE FORMAT
Image Sensor		1/2.7" Progressive CMOS
Maximum Resolution		30 fps @ 1920x1080 (2MP)
Focal Length	f = 3.7 mm	f = 1.6 mm
Aperture	F2.5	F2.0
Field of View	93° (Horizontal), 48° (Vertical), 117° (Diagonal)	180° (Horizontal), 140° (Vertical)
Shutter Time		1/5 sec. to 1/32,000 sec.
WDR Technology		True WDR
Minimum Illumination	1.10 Lux @ F2.5 (Color)	0.66 Lux @ F2.0 (Color)
Pan/tilt/zoom Functionalities		ePTZ: 12x digital zoom
S/N Ratio	53 dB	47 dB
Dynamic Range		100 dB
Dimensions	Ø 24 x 37 mm (Without cable)	Ø 24 x 43 mm (Without cable)
Weight		221 g
Operating Temperature	Starting Temperature: 0°C ~ 50°C (32°F ~ 122°F) Working Temperature: -10°C ~ 50°C (14°F ~ 122°F)	
Humidity	90%	

TECHNICAL SPECIFICATIONS: VIDEO CORE

SYSTEM INFORMATION

CPU	Multimedia SoC (System-on-Chip)
Flash / RAM	128MB / 256MB
On-board Storage	MicroSD/SDHC/SDXC

VIDEO

Compression	H.264 & MJPEG
Video Source	1 Verint camera unit
Maximum Streams	4 simultaneous streams
Video Streaming	Adjustable resolution, quality and bitrate; Configurable video cropping for bandwidth saving AdaptiveStream
Image Settings	Adjustable image size, quality and bit rate; Time stamp, text overlay, flip & mirror; Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks; Scheduled profile settings, 3D noise reduction, video rotation

AUDIO

Audio Capability	Two-way audio (full duplex)
Compression	G.711, G.726
Interface	External audio input; External audio output

NETWORK

Users	Live viewing for up to 10 clients
Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, UDP, ICMP, ARP, SSL, TLS
Interface	10Base-T/100 BaseTX Ethernet (RJ-45)
ONVIF	Supported, specification available at www.onvif.org

INTELLIGENT VIDEO

Video Motion Detection	Five-window video motion detection
------------------------	------------------------------------

ALARM AND EVENT

Alarm Triggers	Motion detection, manual trigger, periodical trigger, system boot, recording notification, camera tampering detection
Alarm Events	Event notification using HTTP, SMTP, FTP, NAS server and SD card. File upload via HTTP, SMTP, FTP, NAS server and SD card

GENERAL

Connectors	RJ-45 connector for Network/PoE connection *1, RJ-12 connector for camera unit connection *1, Audio input *1, Audio output *1, DC 8-36V power input *1, Digital input *1, Digital output *1
LED Indicator	System power and status indicator
Power Input	DC 8-36V, IEEE 802.3af PoE Class 2
Power Consumption	Max. 5.5 W
Dimensions	105 (W) x 84 (D) x 30 (H) mm
Weight	Net: 119 g
Safety Certifications	CE, LVD, FCC Class B, VCCI, C-Tick
Operating Temperature	Starting Temperature: 0°C ~ 50°C (32°F ~ 122°F) Working Temperature: -10°C ~ 50°C (14°F ~ 122°F)

SYSTEM REQUIREMENTS

Operating System	Microsoft Windows 8/7/Vista/XP/2000
Web Browser	Mozilla Firefox 7 ~ 43 (streaming only), Internet Explorer 7/8/9/10/11
Other Players	VLC: 1.1.11 or above, QuickTime: 7 or above

INCLUDED ACCESSORIES

Others	Quick installation guide, warranty card, installation kit
--------	---

World-Class Service and Support

At Verint, we are dedicated to the success of our partners and customers. To this end, we've developed world-class customer support programs and service offerings. Staffed by Verint experts in all facets of networked video deployment and use, Verint's Customer Support Program features live technical support, web-based resources, advanced replacements and a host of on-site professional services.

The Customer Engagement Company™

Americas

info@verint.com
1-800-4VERINT

Europe, Middle East & Africa

info.emea@verint.com
+44(0) 1932 839500

Asia Pacific

info.apac@verint.com
+(852) 2797 5678

	verint.com
	twitter.com/verint
	facebook.com/verint
	blog.verint.com

Unauthorized use, duplication, or modification of this document in whole or in part without the written consent of Verint Systems Inc. is strictly prohibited. By providing this document, Verint Systems Inc. is not making any representations regarding the correctness or completeness of its contents and reserves the right to alter this document at any time without notice. Features listed in this document are subject to change. Not all functionality is available in all configurations. Please contact Verint for current product features and specifications. All marks referenced herein with the ® or TM symbol are registered trademarks or trademarks of Verint Systems Inc. or its subsidiaries. All rights reserved. All other marks are trademarks of their respective owners. © 2018 Verint Systems Inc. All Rights Reserved Worldwide. V1247.4420.180711

VERINT®