

Verint® V3820BTW-DN Bullet Camera



Key Features:

- Max. 2MP(1920x1080)@30fps resolution
- H.264 compression reducing bandwidth and storage needs
- Built-in megapixel motorized lens for remote zoom and focus
- Built-in IR illumination, effective up to 30 meters
- True WDR for better visibility
- Micro SDHC/SDXC memory slot
- IP67/IK10 rated protection
- DC12V and PoE power input
- ONVIF Profile S/G/Q compliance
- Powerful integration with our Verint EdgeVR recorders

Verint® V3820BTW-DN Bullet Camera

2MP • POE • WDR • Smart IR • 30M IR • IP67 • IK10 • Remote Focus and Zoom

The Verint® V3820BTW network bullet camera can be used for indoor and outdoor installations. Featuring a high quality 2MP sensor with a maximum resolution of 1920x1080 at 30 fps. The V3820BTW is a powerful camera with clear sharp images and great features including Wide Dynamic Range (WDR), Remote Focus and Zoom and a built-in MicroSD slot for on-board storage.

For protection against harsh outdoor environments, the camera is encased in a weather-proof IP67-rated housing, making it impervious to rain and dust. Also with its IK10 rating, the camera is vandal resistant and can withstand 5 Joules of impact.

Most importantly the V3820FDW is fully integrated into our Verint EdgeVR® platform making it easy to adjust and maintain over its life. The camera also features easy installation with Auto Camera Config, Remote Password and Firmware Update, HTTPS support for secure connections, integrated camera image adjustment and more.

Verint V3820BTW-DN Technical Specifications

CAMERA FEATURES

Image Sensor	1/2.8"
Lens Type	f2.7mm~13.5mm, F1.4~2.8, Motorized
Optical Zoom	5X
Field of View	Wide 104°(H) 54°(V), Tele 34°(H) 20°(V)
Iris Control	DC Iris (Auto)
Minimum Illumination	Color: 0.006 Lux F1.4 / B/W: 0 Lux when IR on
IR Distance	30M
Adjustable IR	On, Off
D/N Control	Mechanical D/N

IMAGE

Exposure Mode	Auto, Shutter-Priority, Manual, Flickerless, True WDR
Shutter Speed	1/2~1/10,000s
WDR	True WDR
Image Orientation	Off, Flip, Mirror, Both
Privacy Zone	8 Zones
Image Setting	Gain Control, WB, BLC, EV, Gamma Correction, 3DNR, Sharpness, Brightness, Contrast, Hue, Saturation

VIDEO

Video Compression	H.265/HEVC Main Profile H.264 Main/High/Baseline Profile MJPEG
Maximum Frame Rate	3 simultaneous streams 1920x1080@30fps (H.264/H.265) Single: 2MP@30fps Dual: 2MP@30fps + 1280x720@30fps Triple: 2MP@30fps + 1280x720@30fps + 640x360@30fps
System Frequency	60Hz/50Hz
Enhanced Codec	AdaptiveStream, Dynamic 3DNR
Bitrate Control	CBR/CVBR (H.264: 64~20000bps, H.265: 64~8000bps), VBR, MJPEG

INTELLIGENT SOLUTION

Event Source	Schedule, Network Loss Detection
Event Handling	E-mail Notification (*.JPG), OSD Indication, Snapshot to FTP (*.JPG), SD Card Recording (MP4), HTTP Generic Event

NETWORK

User Web Access	Up to 10 clients
Protocols	ARP, DHCP, DNS, FTP, HTTP, HTTPS, HLS, ICMP, IGMP, IPv4/6, LDAP, NTP, RTSP/RTCP/RTP, RTMP, QoS, SMTP, SNMP v1/2c/3, TCP, TLS/TLS, UDP, UPnP, 802.1X, UPnP, Bonjour, SNMP v1/2c/3, DDNS, PPPoE
Internet Security	IEEE 802.1X, HTTPS, Digest Authentication, IP Filtering, Advanced Security

MECHANICAL

Casing Material	Bullet Double Glass - Polycarbonate Bullet Front Cap, Tube - Aluminum Alloy Bullet Bracket - PC+ABS
Weathering Resistance	IP67
Vandal Resistance	IK10
Dimension	84mm x 77mm x 173mm
Weight (camera only)	580g (Approx.)

GENERAL

On Board Storage	1 x micro SDHC/SDXC slot (card not included), Recording & Playback
I/O Interface	1 x Reset Button, 1 x Default Button 1x DC12V Terminal Block 1x RJ45 IEEE 802.3, 10/100 Base-T/TX
Web Browser	Internet Explorer 11, Mozilla Firefox, Chrome, Safari, Microsoft Edge
Memory	RAM 256MB, Flash 128MB
ONVIF Compliance	Profile S/G/Q, Test tool 20.06
Unit Configuration	Web Update, OSD Setting, Date & Time Setting, Multi-language, Account Management, Profile Management

ELECTRICAL

Power Source	PoE, DC12V
Power-over-Ethernet	IEEE 802.3af, Class 3
Power Consumption	7.6W (Max)

ENVIRONMENTAL

Operating Temperature	-30°C ~ 55°C
Cold Start Temperature	-20°C
Storage Temperature	-40°C ~ 60°C
Storage Humidity	90%, non-condensing


CERTIFICATION

	CE/LVD/FCC/UL
RoHS	Yes

COMPLIANCE

NDAA Compliant	Yes
----------------	-----

DIMENSIONS

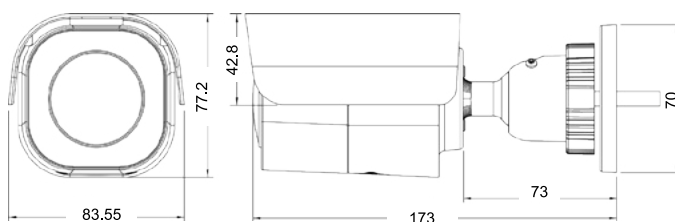

Unit : mm

* Specifications are subject to change without prior notice. Various test standards and conditions applied.



Learn more about Verint V3820BTW-DN at www.verint.com

The Customer Engagement Company™

Americas

9am – 5pm Local Time
1-888-585-7059
EdgeVMS.Support@verint.com

Europe, Middle East & Africa

8am – 6pm GMT
+44 (0) 193 250 9000
EdgeVMS.GlobalSupport@verint.com

Asia Pacific

9am – 5pm SGT
+44 (0) 193 250 9000
EdgeVMS.GlobalSupport@verint.com



[verint.com](http://www.verint.com)



twitter.com/verint



linkedin.com/company/verint



verint.com/blog